

SPECIAL HANDLING

4040-63-67/
Copy 2w. 4

Contract No.

NRO REVIEW COMPLETED

INDEX TO SCHEDULE

	<u>Page</u>
PART I - SCOPE OF WORK	1
PART II - DELIVERY	1
PART III - ESTIMATED COST AND FIXED FEE	1
PART IV - PAYMENT	1
PART V - WAIVER OF REQUIREMENTS OF GENERAL PROVISIONS	2
PART VI - SPECIAL SECURITY RESTRICTIONS	3
PART VII - GOVERNMENT-FURNISHED FACILITIES AND PROPERTY	3
PART VIII - PROGRAM MANAGEMENT AND SYSTEMS ENGINEERING AND TECHNICAL DIRECTION	4
PART IX - OVERTIME	4
PART X - GENERAL PROVISIONS	4

25X1

SPECIAL HANDLING

Contract No.

SCHEDULE

PART I - SCOPE OF WORK

The Contractor shall furnish the necessary facilities, materials and services to accomplish the work set forth in EXHIBIT "A" attached hereto and made a part of this contract.

PART II - DELIVERY

Contractor shall furnish the work set forth in EXHIBIT "A" in accordance with the provisions thereof.

PART III - ESTIMATED COST AND FIXED FEE

a. The total estimated target cost for the performance of this contract, exclusive of the fixed fee is (to be negotiated), and shall be subject to adjustment pursuant to the provisions of the Clause hereof entitled "ALLOWABLE COST, INCENTIVE FEE AND PAYMENT."

b. The total target fee for the performance of this contract is (to be negotiated) and shall be subject to adjustment pursuant to the provisions of the Clause hereof entitled "ALLOWABLE COST, INCENTIVE FEE AND PAYMENT."

PART IV - PAYMENT

a. In accordance with the provisions of Clause 4 of the General Provisions of this contract entitled, "ALLOWABLE COST, INCENTIVE FEE AND PAYMENT," the Government shall pay the Contractor, as full compensation for the performance of this contract, the incentive fee as specified in PART III above, and the Allowable Cost incurred by the Contractor in performance of this contract, and accepted by the Contracting Officer as chargeable in accordance with "Contract Cost Principles, Section XV, Part 2, Armed Services Procurement Regulation;" such determination being subject to the provisions of this contract entitled "Disputes." It being understood and agreed, without limiting the generality of the foregoing, that the following shall be considered as allowable items of cost incurred or paid by the Contractor, and when necessary and required and used for the performance of work hereunder:

SPECIAL HANDLING

SPECIAL HANDLING

(1) Premium costs for overtime work shall be an allowable item of cost hereunder.

(2) There shall be included as allowable indirect costs through overhead, Contractor Research and Development costs as are deemed reasonable and approved by the Contracting Officer in accordance with ASPR XV, Part 2, in effect the date of this contract.

(3) Costs of shipping charges of equipment procured hereunder from Contractor's plant to final destination shall be an allowable cost hereunder. Such costs have not been included in the estimated cost stated in Part 3 hereof. Such non-fee-bearing costs may be claimed by the Contractor for an adjustment in the estimated target costs. The amount by which the target costs become adjusted for this reason shall be excluded from the fee adjustment calculation defined in Paragraph (i) of Article 4 entitled "ALLOWABLE COST, INCENTIVE FEE AND PAYMENT."

b. For purposes of billing current costs incurred under this contract or until such time as an audit of Contractor's interim or final vouchers or invoices are made by the Contracting Officer or his duly authorized representative, the Contractor shall use those rates currently approved by the cognizant Military Department for billing purposes under CPFF contracts.

c. Contractor shall be paid the fee stated in PART III hereof in monthly installments based on allowable costs incurred by the Contractor and approved by the Contracting Officer computed at the same ratio that the total fee stated herein is to the total estimated cost stated herein, subject, however, to the withholding provisions of paragraph (c) of Clause 4 of the General Provisions hereof.

PART V - WAIVER OF REQUIREMENTS OF GENERAL PROVISIONS

Notwithstanding the requirements of any of the General Provisions of this contract to the contrary, whenever the Contractor, in performance of the work under this contract, shall find that the requirements of any of the clauses of the General Provisions are in conflict with security instructions issued to the Contractor by the Contracting Officer or by his duly authorized representative for security matters, the Contractor shall call the attention of the Contracting Officer to such conflict and the Contracting Officer or his duly authorized representative for security matters shall (i) modify or rescind such security requirements or (ii) the Contracting Officer shall issue to the Contractor a waiver of compliance with the requirements of the General Provisions conflicting

SPECIAL HANDLING

SPECIAL HANDLING

with such security requirements. Any waiver of compliance with the General Provisions of this contract issued by the Contracting Officer shall be in writing, except that the approval by the Contracting Officer of any subcontract issued hereunder by the Contractor shall be deemed to constitute approval of waiver of any clauses of the General Provisions in conflict with the stipulations of such subcontract.

PART VI - SPECIAL SECURITY RESTRICTIONS

The Contractor shall not reveal (i) the specific nature of any details of the work being performed hereunder or (ii) any information whatsoever with respect to the department of the Government sponsoring this contract and the work thereunder except as the Contractor is directed or permitted to reveal such information by the Contracting Officer or by his duly authorized representative for security matters, and notwithstanding any clause or section of this contract to the contrary, the Contractor shall not interpret any clause or section of this contract as requiring or permitting divulgence of such information to any person, public or private, or to any officer or department of the Government without the express consent of the Contracting Officer or his duly authorized representative for security matters.

PART VII - GOVERNMENT-FURNISHED FACILITIES AND PROPERTY

a. Contractor is authorized to use on a no-charge-for-use basis those facilities furnished or to be hereinafter furnished under Air Force Facilities Contract [] provided such use does not interfere with the purpose for which such facilities are furnished.

b. Contractor is also authorized to use on a no-charge-for-use basis such items of special tooling, test equipment and facilities generated under any other contract between the parties hereto.

c. The Government shall also furnish those items of equipment set forth in Exhibit "A" which are to be retained by the Contractor for the performance of the work called for herein.

d. This contract does not include the use of any panoramic camera residual inventory from Contract No. BT-1943. However, at such time as such residual inventory may no longer be required by the Contractor to insure performance under Contract BT-1943, or the final residual inventory list is available from Contract No. BT-1943, the Contractor will review such inventory for possible use under this contract and shall so inform the Contracting Officer that such material has been or can be transferred in order that appropriate disposition action may be accomplished.

SPECIAL HANDLING

SPECIAL HANDLING

PART VIII - PROGRAM MANAGEMENT AND SYSTEMS ENGINEERING AND TECHNICAL DIRECTION

a. The Contractor shall plan and conduct program development, design, tests, and manufacturing leading toward the attainment of the Panoramic Camera Subsystem described in Contractor Specification No. 55155 dated 7 March 1963.

b. Management of the program is the joint responsibility of several Agencies of the Government. In the interest of effective management, however, technical direction shall be provided by SAFSP through the 622 A Program Office of the Air Force Space Systems Division as the agent for all interested Agencies of the Government. The 622 A Program Office established in SSD will be the single day-by-day point of contact with the Contractor.

c. The role of the Systems Engineering Contractor as pertains to systems engineering, approval of systems requirements, and acceptance of deliverable equipment, is herein recognized. Detailed functions and responsibilities of SE/TD are contained in Document SP2-085, Operating Procedures of SE/TD, dated 4 April 1962, said document being incorporated herein by reference.

PART IX - OVERTIME

It is recognized that extensive overtime and extra-shift premium wage payments will be required in order to fulfill the performance schedule of the contract. The Contractor agrees to limit such overtime and extra-shift utilization, insofar as practicable, consistent with meeting such schedule. Therefore, no restrictions are imposed on such utilization and prior approvals therefore are not required.

PART X - GENERAL PROVISIONS

The rights and obligations of parties to this contract shall be subject to and governed by the General Provisions (as amended) which are contained in and are a part of Contract No. BT-1943, including the amendments to Article, 4, "ALLOWABLE COST, INCENTIVE FEE AND PAYMENT (May 1961)" and the understanding that the requirements of paragraph a) and b) of Article 8. "SUBCONTRACTS" shall be [] for fixed-price subcontracts and [] for all cost-type subcontracts. No other subcontracts shall require such approval.

Also, Paragraph (i) of Article 4 of the General Provisions shall be revised to read as follows:

SPECIAL HANDLING

NRO
25X1

NRO
25X1

25X1

Approved For Release 2002/10/21 : CIA-RDP66B00728R000300080009-0

Approved For Release 2002/10/21 : CIA-RDP66B00728R000300080009-0

~~SPECIAL HANDLING~~

Page 1 of 5 Pages

EXHIBIT "A"

FIVE (5) UNIT FOLLOW-ON

- A. Contractor shall furnish the necessary facilities, materials, and services to accomplish the Statement of Work set forth below and make delivery to the Government at the times and places specified herein below:

STATEMENT OF WORK

- Item 1. - Fabricate five (5) each Panoramic Camera Subsystems in accordance with Contractor's Specification No. 55155, dated 7 March 1963, including the supplement attached thereto, said documents being incorporated by reference, together with such changes as may be agreed to between the Contractor and the Contracting Officer.
- Item 2. - Contractor shall furnish the following GHE and GSE:
- a. Supply thirty (30) sets each film transit case spiders and protective flanges. (Existing spiders and flanges will be recycled.)
- Item 3. - Furnish thirteen (13) film spools for the camera subsystem. (Existing spools will be refurbished and recycled.) Delivery shall be made in accordance with the Film/Spool/Transit Case schedule developed by the Contractor.
- Item 4. - Furnish necessary field engineering services to support the subsystems at LMSC and VAFB in accordance with Detailed Field Engineering and Flight Support Work Statement, dated 15 March 1963. These services shall include integration of the Stellar/Index Camera Subsystems as furnished to the LMSC facility by Itek under separate contract. The Dynamic Resolution Tester installed at LMSC's A/P facility shall be maintained and operated by Itek personnel.
- Item 5. - Contractor shall furnish spares in accordance with the following:
- a. On or before ninety (90) days after authorization to proceed, Boston shall furnish the systems Engineering Contractor seven (7) copies of a production list containing the part number, description, and quantity of those parts deemed necessary by Boston to support the equipments after shipment from Boston, considering the delivery schedule and two (2) facilities. This list shall indicate those long lead-time items already released to support the equipments.

~~SPECIAL HANDLING~~

SPECIAL HANDLING

Page 2 of 5 Pages

- b. If within thirty (30) days from the date of submission, the Systems Engineering Contractor and the Customer has neither approved nor disapproved all the items contained in such production lists, those items shall be deemed to have been authorized for provisioning purposes. In the event items are disapproved by the Customer, procurement activity shall be terminated where necessary.
- c. Spares shall be shipped to the Associate, F.O.B. the Associate's facility for maintenance of accountability in a segregated Stores Area. The parts shall be available to Boston's Field Engineering and Flight Support Group to replace those parts as may be necessary to certify flight readiness of the camera sub-systems.
- d. The cost, fixed-fee, and delivery schedule of these spares shall be determined at a later date.

Item 6. - Contractor shall perform Inspection and Acceptance Tests in accordance with Specification No. 55155 and the following:

- a. Inspection of the material to be delivered from Boston shall be at a level deemed necessary by Boston and approved by the Government to insure performance. Boston shall provide additional inspection services in the event performance verification or rework is necessary to such material after acceptance and delivery. Boston shall also verify that no damage in transit has occurred to its materials after shipment from one facility to another.
- b. Shipment is F.O.B. Lexington, Massachusetts, via such carriers and to such destinations as may be designated by the customer. Boston will provide instrument transit cases.
- c. Final acceptance of equipment and materials to be delivered shall be at Boston. The Systems Engineering Contractor and other Customer's representatives will be notified five (5) days prior to the beginning of final acceptance tests. These tests shall be administered in accordance with the approved Acceptance Test Procedures. Requests for waivers on end item equipment deliveries shall be submitted to SE/TD for resolution. The execution of a DD Form 250 by Itek, which may contain concurrence signatures of the Systems Engineering Contractor's and other Customer's representatives, shall constitute final acceptance. Copies of the DD Forms 250 will be forwarded to the Contracting and Finance Officers.

SPECIAL HANDLING

SPECIAL HANDLING

Page 3 of 5 Pages

Item 7. - Contractor shall furnish the following reports and attend required meetings as follows:

- a. Weekly TWX progress report - to be forwarded to SE/TD on Wednesdays and shall report significant highlights of development for the preceding week - ending Saturday.
- b. Monthly TWX Financial Report - to be forwarded to the Contracting Officer the 20th of each month for the preceding Boston accounting month.
- c. Weight Report - to be forwarded every two (2) weeks to the Systems Engineering Contractor showing current weight estimate and first and second moments of inertia. Should the details of the report be unchanged, a TWX statement to that effect will be forwarded in lieu of the report.
- d. Acceptance Test Reports - to be forwarded as part of each subsystem logbook.
- e. Post-flight Engineering Analysis Report - ten (10) copies to be forwarded to SE/TD upon completion of each analysis. LMSC will furnish Contractor with copies of all pertinent telemetering data obtained during flight for engineering analysis by the contractor of camera subsystem performance.
- f. Systems Engineering Meetings shall be held once each month alternately at Associate and Boston. Such meetings shall be chaired and minutes prepared and distributed by the Systems Engineering Contractor. Contractor shall present such briefing aids and data as required.

Item 8. - Contractor shall provide the Systems Engineering Contractor with documentation of each Panoramic Camera Subsystem consisting of:

1. Panoramic Camera Subsystem Logbook.
2. Pan Subsystem Electrical Schematics as wired (three each). These drawings may be red-lined.

SPECIAL HANDLING

SPECIAL HANDLING

Page 4 of 5 Pages

- B. Delivery - Contractor shall deliver the work called for above in accordance with the following schedule. Unless otherwise specified, acceptance and inspection shall be at Contractor's plant or plants for shipment to be made F.O.B. Contractor's plant, Lexington, Massachusetts.

Item 1. - Panoramic Camera Subsystem, Five (5), (less supply spools)

Unit No. 09	20 November 1963
Unit No. 10	20 December 1963
Unit No. 11	20 January 1964
Unit No. 12	20 February 1964
Unit No. 13	20 March 1964

Item 2. -

	<u>D</u>	<u>B</u>	<u>Date</u>
a. Supply thirty (30) sets each film transit case spiders and protective flanges.	30		Per Plan

Item 3. - Film Spools (New and Refurbished) Per Plan

Item 4. - Field Engineering Services shall be furnished as required for the period of performance of this Contract, contemplated to be through 31 July 1964.

Item 5. - Spare parts shall be delivered in accordance with Item 5 of Paragraph A of this Work Statement.

Item 6. - Inspection and Acceptance shall be performed in accordance with Item 6 of Paragraph A of this Work Statement.

Item 7. - Reports - Deliver in accordance with a. through f. of Item 7 of Paragraph A of this Work Statement.

Item 8. - Data - Deliver in accordance with Item 8 of Paragraph A of this Work Statement.

SPECIAL HANDLING

SPECIAL HANDLING

Page 5 of 5 Pages

C. Furnished Equipment

<u>Item</u>	<u>Description</u>	<u>Delivery Date</u>
1.	Film and film transit cases as required for testing and checkouts.	Per Plan
2.	Five (5) each "Adapter Rings," Part No. 52011, supplied under Contract BT-1943.	3 ea - 15 July 1963 2 ea - 1 October 1963
3.	Contractor will be furnished and is also authorized to use on a no-charge-for-use basis such items of special tooling, test equipment, ground handling equipment, ground support equipment, and facilities generated under any previous contract entered into between the parties hereto.	

SPECIAL HANDLING

SPECIAL HANDLINGAPPENDIX AExceptions to 2.0 APPLICABLE DOCUMENTS1.0 EXCEPTIONS TO 6117B

- a. Change paragraph 1.1.5 to read "AET Engineering Department of Contractor."
- b. Delete paragraph 1.2.2.1 and substitute "Equipment shall be transported by military transport aircraft and motor vans. The equipment shall be protected and packaged to withstand such conditions as well as shock and vibration prevalent during shipping."
- c. Delete paragraph 1.2.3 and substitute "Contractor storage facilities will ordinarily be air-conditioned. However, heat and high humidity may occur, and equipment should be able to withstand such conditions."
- d. Delete paragraphs 1.2.4.1, 3.2.1.4, 3.2.1.5, 4.3.1, 4.4, 4.6, 4.7, and 4.8.
- e. Change paragraph 2.1 to read "MIL-E-5272C (ASG)-13 April 1959 and Amendment No. 1, 20 January 1960 - Environmental Testing, Aeronautical and Associated Equipment, General Specification for" - all other MIL standards not applicable.
- f. Delete paragraph 2.4.
- g. Delete paragraphs 3.2.1, 3.2.2.2, and 3.2.2.3.
- h. Change paragraph 4.1.1 to read "humidity of not more than 70 percent".
- i. Paragraphs 4.3 through 4.8.3 - not applicable.
- j. Delete paragraph 4.9.1 and 4.9.2.
- k. Delete paragraph 4.10.1.
- l. Table VI - not applicable.

9040

TITLE

SPECIFICATION FOR 66" f/5
PANORAMIC CAMERA SUBSYSTEM

55155

SPECIAL HANDLING

SPECIAL HANDLING

- m. Paragraph 4.10.2 will be used as a guide in preparing the Qualification Test Specification, Procedures, and design of the qualification fixtures.

2.0 EXCEPTIONS TO 447969A

2.1 The following techniques, which have proved effective in the past will be employed for grounding and shielding and will satisfy the general intent of 447969A and the requirements of Specification 55155.

2.1.1 The chassis will in no case be used as a circuit path. There will be a minimum isolation of 1 megohm between chassis and all power and signal circuits.

2.1.2 Loads on each power category will be kept separated throughout the camera. That is, regulated return, unregulated return, 400-cycle return and TM return will not tie to each other in the camera.

2.1.3 No attempt will be made to float electronic chassis with respect to the structure.

2.1.4 Each electronic chassis will be tied electrically to a central chassis ground point.

2.1.5 All 400-cycle circuits will be run twisted shielded.

2.1.6 All shields at the interface, if picked up in the camera, will be carried through interface connectors to the load or signal source without commoning to other shield circuits and without being tied to any power return circuit or chassis.

2.1.7 Connector pins will be allocated to maintain spacing between power and signal circuits.

2.1.8 Shields will be grounded at but a single point. Shields will be insulated from each other in cable bundles.

2.1.9 Power distribution to subsystems not essential to the primary flight objective will be fused.

2.1.10 Wire sizes will be selected consistent with MIL-W-8160C.

2.1.11 Radio interference criteria will be applied for the entire camera rather than on a component or subassembly basis.

25X1

9040

TITLE
SPECIFICATION FOR 66" f/5
PANORAMIC CAMERA SUBSYSTEM

55155

SPECIAL HANDLING

- 2.1.12 The overall schematic will show the shields and grounds distribution details.
- 2.1.13 New designs will incorporate wherever feasible, the techniques outlined in 447969A.
- 2.1.14 The following techniques will be employed in the camera to reduce radio interference at its source.
- 2.1.14.1 Dual LC filters will be used in conjunction with all DC motors.
 - 2.1.14.2 Diodes or arc suppressors will be used to reduce inductive transients on relay coils, brakes, and solenoids.
 - 2.1.14.3 Mounts for motors, etc. are spot-faced to provide good contact with the frame.

25X1

9040


TITLE
SPECIFICATION FOR 66" f/5
PANORAMIC CAMERA SUBSYSTEM

55155


SPECIAL HANDLING

- 2.1.12 The overall schematic will show the shields and grounds distribution details.
- 2.1.13 New designs will incorporate wherever feasible, the techniques outlined in 447969A.
- 2.1.14 The following techniques will be employed in the camera to reduce radio interference at its source.
- 2.1.14.1 Dual LC filters will be used in conjunction with all DC motors.
- 2.1.14.2 Diodes or arc suppressors will be used to reduce inductive transients on relay coils, brakes, and solenoids.
- 2.1.14.3 Mounts for motors, etc. are spot-faced to provide good contact with the frame.

25X1

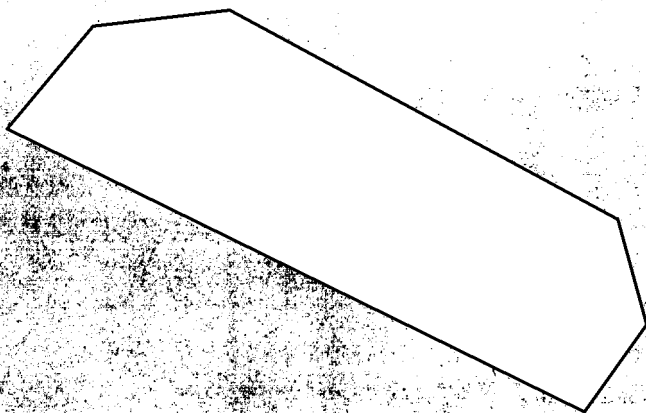

25X1



9040

TITLE
SPECIFICATION FOR 66" f/5
PANORAMIC CAMERA SUBSYSTEM

55155

SPECIAL HANDLING

SPECIAL HANDLING

- m. Paragraph 4.10.2 will be used as a guide in preparing the Qualification Test Specification, Procedures, and design of the qualification fixtures.

2.0 EXCEPTIONS TO 447969A

2.1 The following techniques, which have proved effective in the past will be employed for grounding and shielding and will satisfy the general intent of 447969A and the requirements of Specification 55155.

- 2.1.1 The chassis will in no case be used as a circuit path. There will be a minimum isolation of 1 megohm between chassis and all power and signal circuits.
- 2.1.2 Loads on each power category will be kept separated throughout the camera. That is, regulated return, unregulated return, 400-cycle return and TM return will not tie to each other in the camera.
- 2.1.3 No attempt will be made to float electronic chassis with respect to the structure.
- 2.1.4 Each electronic chassis will be tied electrically to a central chassis ground point.
- 2.1.5 All 400-cycle circuits will be run twisted shielded.
- 2.1.6 All shields at the interface, if picked up in the camera, will be carried through interface connectors to the load or signal source without commoning to other shield circuits and without being tied to any power return circuit or chassis.
- 2.1.7 Connector pins will be allocated to maintain spacing between power and signal circuits.
- 2.1.8 Shields will be grounded at but a single point. Shields will be insulated from each other in cable bundles.
- 2.1.9 Power distribution to subsystems not essential to the primary flight objective will be fused.
- 2.1.10 Wire sizes will be selected consistent with MIL-W-8160C.
- 2.1.11 Radio interference criteria will be applied for the entire camera rather than on a component or subassembly basis.

25X1

9040

TITLE
SPECIFICATION FOR 66" f/5
PANORAMIC CAMERA SUBSYSTEM

55155

SPECIAL HANDLING

63-549
Copy no. 13

SPECIAL HANDLING


REVISIONS

SYM	DESCRIPTION	DATE	APPROVAL

25X1

25X1

Specifications Procedures

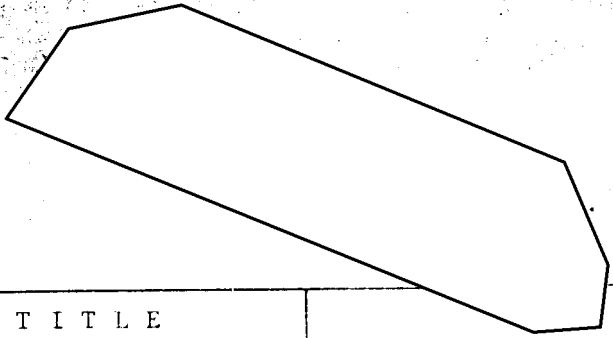

Engrg			TITLE SPECIFICATION FOR 66" f/5 PANORAMIC CAMERA SUBSYSTEM	9040
Engrg				
Engrg				
Project				
QA App'd				
SE App'd				
Sheet	7 MARCH 1963		Approved For Release 2002/10/21 : CIA-RDP66B00728R000300080009-0	5 5 1 5 5
			SPECIAL HANDLING	Code Sheet 1 of 22

SPECIAL HANDLING**1.0 SCOPE**

1.1 **Objective:** This specification covers the requirements for a high-acuity panoramic camera as defined in Systems Requirements Specification SP2-126. The panoramic camera is to provide programmed vertical and stereo photographs at a resolution level of 80 l/mm. The system is to be designed to be used in a light-tight structure and will allow recovery of the film only.

2.0 APPLICABLE DOCUMENTS

2.1 The following publications of the issue in effect as of date of issue indicated, shall form a part of this specification to the extent specified herein. In the event of conflicting provisions, the requirements of this specification shall prevail. See Appendix A.

<u>Specification Number</u>	<u>Title</u>	<u>Date of Issue</u>
MIL-STD-150A	Photographic Lenses	12 May 1959
6117B	Environmental Test, Specification	1 July 1960
MIL-E-1D	Electron Tubes and Crystal Rectifiers	31 March 1958
447969A	Systems Electrical Interface Specification	9 April 1962
1072045D	Cable Design Control Specification	8 December 1960
SP2-156C	Electrical Interface	9 September 1962
T55-100	Interface Drawing	14 July 1962
43704F	Format Drawing	17 July 1962
SP-0004A	Process Specification, Film Type SO-132	
SP2-126	Systems Requirements Specification	3 April 1962
49346A	Spooled Film	14 September 1962
TD-55	Semi-Conductor X-ray Inspection	
1326684A	Mirror, Metal	20 July 1961

8040

TITLE

SPECIFICATION FOR 66" f/5
PANORAMIC CAMERA SUBSYSTEM

55155

SPECIAL HANDLING

SPECIAL HANDLING**3.0 REQUIREMENTS****3.1 General**

3.1.1 General Requirement: The cameras shall conform to the requirements of this specification.

3.1.2 Parts, Materials, Processes: Shall be consistent with flight objectives and good design practices. When and where applicable, MIL standards and specifications for space equipment shall be used as a guide.

3.1.3 Weight: Total weight of the panoramic camera including empty supply spool but excluding cassette shall not exceed 627 pounds. Maximum film capacity will be 75 pounds. The cassette shall not exceed 17 pounds.

3.2 Selection of Specifications and Standards

3.2.1 Standard Parts: AN or MIL standard parts shall be used wherever possible.

3.2.2 Commercial Parts: In applications for which no suitable corresponding AN or MIL part exists or where they are not readily available, qualified commercial parts may be used.

3.3 Material

3.3.1 Metals: Metals shall be of the non-corrosive type or be suitably protected (subject to the thermal requirements) to resist corrosion during maximum service life. (Test, storage, and flight.)

3.3.2 Semi-Conductors: The following ground rules apply in the selection of semi-conductors:

3.3.2.1 Requirements and characteristics of MIL-E-1D must be considered minimum, and no component shall be used that is not vendor-certified or tested to the limits of that specification.

3.3.2.2 The environmental requirements of 6117 may be used as minimum levels, provided sufficient de-rating is applied to verify thermal competence.

9040

TITLE

SPECIFICATION FOR 66" f/5
PANORAMIC CAMERA SUBSYSTEM

Approved For Release 2002/10/21 : CIA-RDP66B00728R000300080009-0

SPECIAL HANDLING

55155

SPECIAL HANDLING

3.3.2.3 All semi-conductors must be X-ray inspected, per TD-55.

3.3.3 Electrical: Interface power and power distribution characteristics shall be as specified by 447969, System Electrical Interface. 447969 shall be used as a guide for Camera System power and signal distribution, shielding, and grounding.

3.4 System Design Objective: The camera subsystem shall satisfy the high-acuity, panoramic camera concept and shall include a take-up cassette which will be independently mounted in a recovery capsule. Electrical circuits, controls, and cycling programmer capable of operating on commands from the vehicle programmer shall be included. Instrumentation which will provide inputs to the vehicle telemetry system to monitor critical functions of cameras while in flight will be established as indicated in SP2-156.

3.4.1 Photo Quality: Panoramic photographs will be of such quality as to permit the resolution of an adequately illuminated Air Force test pattern at a level of 80 l/mm. Tests shall be conducted for qualification and acceptance of equipment using an Air Force test pattern of the type defined in MIL-STD-150A. Target contrast shall be that required to present 2:1 contrast at the camera mirror.

3.4.2 Location Accuracy: The system design objective for location accuracy of any point on the panoramic photograph shall be ± 2 miles.

3.4.2.1 Time recording to an accuracy of 10 milliseconds will contribute a maximum uncertainty of $\pm 1/20$ mile.

3.4.2.2 Positioning of the optical axis to within ± 15 minutes of arc will result in a possible error of $\pm 1/10$ mile.

3.4.3 Lifetime: The mission life will be one to four days during which photographs can be taken at intermittent times.

3.4.4 Swath Width: The panoramic camera shall provide ability to photograph selected target areas having a nominal swath width corresponding to a scan angle of 21.72 degrees, and having photographic quality per paragraph 3.4.1. Additional scanning for acceleration and deceleration may be necessary.

3.4.5 Stereo: Stereo photography will be 8 frames forward and 8 aft along the vehicle flight path. There will be a dead zone between photographed areas equal in length to the length of the

9040

TITLE

SPECIFICATION FOR 66" f/5
PANORAMIC CAMERA SUBSYSTEM

Approved For Release 2002/10/21 : CIA-RDP66B00728R000300080009-0

SPECIAL HANDLING

55155

SPECIAL HANDLING

target photographed. The stereo will have a fore and aft convergence angle of 30 degrees. The camera shall be capable of vertical photography and may be commanded in flight to provide stereo photography. Stereo mode shall be primary; therefore monoscopic mode shall be secondary.

3.4.6 Roll Positioning: Roll positioning of the camera will be provided for selection of targets not directly beneath the flight path. The maximum roll angle to be provided will be 30 degrees. A signal indicating the angle of roll with respect to vertical will be provided in five (5) discrete positions (-30° -15° 0° $+15^{\circ}$ $+30^{\circ}$) to allow correction of the IMC system and to film-record the roll angular command in the auxiliary data block. The nominal response time for cam positioning shall be 60 seconds from -30° to $+30^{\circ}$ roll.

3.4.7 Scan Overlap: Approximately 10 percent overlap at nadir between successive panoramic scans shall be provided.

3.4.8 Operate Cycle: 16 scans shall constitute a minimum basic panoramic camera operating cycle. Additional camera start pulses will be required to continue operation in periods of 16 frames.

3.4.9 Continuous Cover: Once placed in operation, the cameras shall have the ability to operate in a continuous manner for a maximum of 20 minutes during the mission duty cycle.

3.4.10 Programming: The orbital programmer will be used for commanding operation.

3.4.11 Environmental Performance: The camera subsystems shall perform within the limits established in this specification when exposed to any natural combination of the environments specified.

3.5 Vehicle, System Characteristics, and Interfaces

3.5.1 V/h for IMC: Ground selection of a suitable time varying V/h ramp will be required via real time command. The median velocity/altitude ratio shall be 0.03442 radians per second. The system will be capable of accepting commands in the V/h range 0.0231 to 0.0482 radians/second and will accomplish IMC. A minimum of 10 ramps will be provided. These ramps will be adjusted prior to flight to narrow the design V/h range by a factor of 3 for improved V/h accuracy. Ramp repeatability, once set, shall be one (1) percent. The system shall be capable of operating on both increasing and decreasing V/h conditions. The assignment of ramps as increasing or decreasing functions must be made prior to flight.

9040

TITLE

SPECIFICATION FOR 66" f/5
PANORAMIC CAMERA SUBSYSTEM

Approved For Release 2002/10/21 : CIA-RDP66B00728R000300080009-0

SPECIAL HANDLING

55155

Sheet 5 of 22 Sheets

SPECIAL HANDLING**3.5.2 Vehicle Stabilization Requirements****3.5.2.1 Angular Deviations**Roll \pm 1 degreePitch \pm 3 degreesYaw \pm $\frac{1}{2}$ degree (corrected for earth's rotation).

Capability to change the yaw of the vehicle from 0 to 3.6 degrees at a rate of 0.16 degrees/minute commensurate with the inclination angle will be provided by the associate.

3.5.2.2 Residual Angular VelocitiesRoll and pitch \pm 0.6 degrees/minuteYaw \pm 3.0 degrees/minute**3.5.2.3 Momentum Balancing: No momentum balancing is to be provided. Panoramic camera supply and take-up**

spools shall be counter-rotating.

3.5.3 Camera Compartment Environment**3.5.3.1 Pressure: The camera compartment will be unpressurized.**

3.5.3.2 Temperatures: During photographic operation, temperature of the panoramic camera shall be maintained at 75 degrees F \pm 10 degrees F. Gradients on the take-up cassette ranging from 20 degrees F to 180 degrees F can be expected during recovery. Gradients and transients affecting lens and structure maintaining focal length will be controlled to tolerable levels by thermal design. Thermal design shall:

- a. Establish the same uniform ambient temperature of the lens cell and the platen support tube to aid in maintaining focus using passive thermal control wherever possible.
- b. Minimize mirror temperature gradients.
- c. Provide cooling for camera electronics and electromechanical devices.
- d. Provide thermal protection for the film near heat sources greater than 150 degrees F and maintain thermal stability of film areas.

TITLE

SPECIFICATION FOR 66" f/5
PANORAMIC CAMERA SUBSYSTEM

55155

SPECIAL HANDLING

9040

SPECIAL HANDLING

To assure stable operational temperatures, emissive coatings and thermal insulation will be applied on those areas of the camera structure and components as shall be mutually agreed upon by Itek and the associate. Specific power dissipating components and temperature-sensitive components or subassemblies shall be the subject of special consideration for negotiation by the associate contractors with System Engineering.

3.5.3.3 Light-Tight: The associate structure which serves as a camera compartment will be constructed in such a manner as to prevent light other than image forming light from falling on and exposing the film at any time. Light boots within the camera to meet this requirement will be provided by Itek.

3.5.4 Auxiliary Data Film Record

3.5.4.1 Time Signal: A digital clock (associate-furnished) will operate in conjunction with the camera subsystem for supplying signals for illumination of 29 lamps in the data blocks of both the panoramic and the stellar/index cameras. It will be capable of storing time unambiguously for a period of 5 days in increments of 0.01 second or less. A readout will be provided to transfer the clock reading to the film once per frame, and a serial binary readout will be provided to transfer the clock reading via the telemeter. The clock error will not exceed 10 milliseconds in any 12-hour period after accounting for clock drift and offset. Clock readout will be initiated by lens scan angle at center of format and clock readout must be exposed in 200 milliseconds or less. The maximum repetition rate of the panoramic clock interrogate signals is approximately 1.25 seconds per cycle. Clock output will be $15V \pm 1/2V$. Output pulse duration shall be adjustable from 40 to 100 milliseconds.

3.5.4.2 Stereo: Three lights indicating mirror position will be provided.

3.5.4.3 Roll Steering: Three lights indicating IMC cam angular position will be provided.

3.5.4.4 Film Information: An edge mask shall be provided for photo-recording fiducial and shrinkage marks, and picture format in accordance with Itek drawing 43704.

3.5.4.5 Attitude Information: The stellar camera, of the stellar/index camera subsystem will supply photographic records of roll and pitch positioning to 0.1 degree accuracy.

3.5.4.6 Scan Rate: Scan rate shall be determined from

8040

SPECIAL HANDLING

film data to at least ten percent (10%) accuracy.

3.5.4.7 End of Pass: 4 lights.

3.5.5 Electrical Power: SP2-156 delineates the electrical connectors that shall be provided.

3.5.5.1 Electrical Power (Maximum):

<u>Power Source</u>	<u>V/h</u> <u>Gene-</u> <u>rator</u>	<u>Cassette</u> <u>Heater</u> <u>Power</u>	<u>Required</u> <u>Camera</u> <u>Avg. Pwr.</u> <u>During</u> <u>Operate</u>	<u>Total Avlb.</u> <u>Energy</u> <u>During</u> <u>100/hr. Flg.</u> <u>incl. Htrs.</u>
Plus 22.00 to plus 29.25 VDC unregulated		15w*	600w	1900 w/hrs.
Plus 28.3 VDC plus or minus 2.0 percent regulated			100w	1875 w/hrs.
Minus 28.3 VDC plus or minus 2.0 percent regulated			50w	125 w/hrs.
115V plus or minus 1 percent single phase 400 cps plus or minus 0.02 percent	10w for 40 min.*		35w	80 w/hrs.

*as programmed

3.5.5.1.1 Starting Transient: Maximum starting transient load on the unregulated DC supply shall not exceed 1500 watts and shall be limited in duration to a maximum of 1 second at the beginning of each operate period.

9040

TITLE
SPECIFICATION FOR 66" f/5
PANORAMIC CAMERA SUBSYSTEM

55155

SPECIAL HANDLING

3.5.5.1.2 Recurring Peaks: Maximum recurring peaks shall not exceed 1000 watts of unregulated DC not exceeding 500 millisecond duration during camera operation.

3.5.5.1.3 Noise Level: Past experience has indicated that considerable noise may be present in these sources. All electrical circuits and controls should be designed to be capable of operating in the presence of noise as high as 2.0V (peak-to-peak) due to 2000 cps regulation on the plus and minus regulated DC power supplies. Transients of ± 10 volts of 10 millisecond duration may be experienced.

3.5.5.1.4 Ascent Phase: If required during ascent, the vehicle will supply 50 watts of +28 volt unregulated power continuously and 150 watts of +28 volts regulated power immediately after launch to the camera subsystems. Should this power be required, all tests will be performed under simulated conditions of power.

3.5.6 Programmer: Camera ON/OFF operation using "auto cycle" pulse command, V/h programmer synchronization, stereo/mono mode, discrete roll positioning command signals and stellar/index ON/OFF commands shall be provided by the command programmer. An "auto cycle" mode of 16 frames will be initiated upon receipt of a command pulse (0.05 minimum to 0.50 maximum second duration). Each additional continuing operation requires an additional pulse occurring not sooner than 2 seconds after the first pulse and not later than 2 seconds prior to normal camera shutoff after 16 frames at maximum V/h. Number of scans during auto cycle is identical for both stereo and mono modes.

3.5.7 Commands: Signals for the operation of the equipment must be obtained. The operation signals to be provided are as follows:

COMMAND	SIGNAL SOURCE	LOAD
Panoramic burst pulse	1 relay	1 amp. max.
V/h - IMC - Selection of best time function for internal V/h approximation. A pulse train signal will make this selection via real time command.	Command link	24-volt stepping switch coil
V/h Generator Command (ON/OFF)	1 relay	1 amp. max.

9040

TITLE
SPECIFICATION FOR 66" f/5
PANORAMIC CAMERA SUBSYSTEM

55155

SPECIAL HANDLING

SPECIAL HANDLING

<u>COMMAND</u>	<u>SIGNAL SOURCE</u>	<u>LOAD</u>
Stereo/mono mode selection	1 relay	1 amp. max.
Roll Steering IMC cam control (during time camera rolled)	3 binary-coded relays	1 amp. max.
Stellar/index intervalometer command (ON/OFF)	1 relay	1 amp. max.
Pan Command Reset	1 relay	1 amp. max.

3.5.8 Stellar/Index Control and Programming: The associate shall provide a signal to initiate and continue operation of the Stellar/Index Camera Subsystem, as required throughout the mission. The panoramic camera will act as the intervalometer, proportional to V/h, and provide all subcycle commands required by the stellar/index camera, whether or not panoramic photography is being accomplished. Stellar/index photography will be accomplished at a ratio of one exposed frame for every ten panoramic cycles and expose no more than three (3) S/I frames for each sixteen (16) frame bursts of the panoramic instrument. The S/I camera shall operate whenever the main instrument operates independent of whether or not an "intervalometer" command is received. The S/I camera can operate without the main instrument by applying "intervalometer" command. This ratio provides 50 to 65 percent overlap at all V/h ratios.

3.6 Design: The panoramic camera is intended to provide high resolution stereoscopic or monoscopic photographs of selected target areas. It is an integral system whose operation shall be sequence-programmed and automatic upon command, including film transport, scanning, IMC, and auxiliary data recording. The basic design (Hyac-type panoramic) utilizes a curved focal plane arc containing stationary film with panoramic scanning accomplished by rotation of the lens about its nodal point. It will accomplish both vertical and fore and aft stereo photography by tilting a mirror.

3.6.1 Configuration: The design of the camera shall be such so as to permit installation in an envelope as defined by Drawing Number T55-100.

3.6.2 Mechanical Interface: In accordance with Drawing Number T55-100.

3.7 Construction: Within the limits of weight and space available, construction techniques, processes, and materials shall be

9040

TITLE
SPECIFICATION FOR 66" E/5
PANORAMIC CAMERA SUBSYSTEM

55155

SPECIAL HANDLING

selected to provide the maximum in structural integrity for the environment to be encountered.

3.7.1 Suspension: The principle parts of the camera shall be designed for the panoramic camera to be operated as an integral unit. The principle parts of the camera are the lens drive assembly, mirror and drive assembly, shutter platen assembly, film transport mechanism including supply spool, film "dancer" loops and associated parts and drive mechanism, and a take-up cassette including spool and drive located in the recovery capsule. The panoramic camera shall be supported by the external skin of the vehicle and held in such a way to maintain alignment with the cassette and the stellar/index subsystem, per T55-100.

3.7.2 Maintaining Focus: The support of the film platen shall establish and maintain the distance from the lens nodal point to the film to the accuracy required to attain the specified resolution. Construction of the lens cell, the structure maintaining focal length and the platen assembly shall ensure that the spacing from lens to film will not be changed due to launch acceleration, vibration, and shock. The construction and materials shall maintain focus during and subsequent to the uniform ambient temperature variations expected.

3.7.3 Film Thermal Shielding: Film paths and equipment near high-temperature external skin shall be properly thermally shielded if required.

3.8 Performance:

3.8.1 Photographic Quality: The high-acuity panoramic camera, when operated, will produce a minimum degradation of static lens-film resolution. The design objective shall be 90 percent of the static AWAR lens-film resolutions obtained on the Mann Bench. The camera shall produce photographs with an AWAR resolution of 80 lines/mm or greater when operated under simulated flight condition utilizing the DRT with a moving Air Force Test Pattern as defined in MIL-STD-150. Target contrast shall be that required to present 2:1 contrast at the camera mirror.

3.8.2 Image Motion Compensation Accuracies: The forward motion compensation mechanism and the scan drive system shall have performance compatible with the design requirement pertaining to photographic quality and five (5) to fifteen (15) percent overlap.

3.8.3 Lens Drive Smoothness: The lens drive system, which is used for focal plane scanning in addition to forward

9040

TITLE
SPECIFICATION FOR 66" f/5
PANORAMIC CAMERA SUBSYSTEM

55155

SPECIAL HANDLING

SPECIAL HANDLING

motion compensation shall be smooth such that no objectionable banding occurs on the photography of ground scenes. For measurement purposes, the amount of banding present will be determined using a stable diffuse DC light source or a strobe light.

3.8.4 Exposure Control Evenness: Banding caused by non-uniform lens motion shall be controlled to produce less than 0.15 Log E change in exposure. The Delta Log E exposure change shall be determined by reference to the straight-line portion of SO-132 sensitometric control film printed and normally processed with the banding exposure test per Specification 0004, Process Specification.

3.9 Major Components: The high-acuity panoramic camera shall consist of:

3.9.1 Film

3.9.1.1 Base: The camera shall be designed to utilize SO-132/130 or equivalent thin base (0.0035-inch) polyester film. Use of polyester materials varying in thickness between 1.8 and 4 mils will be a design objective.

3.9.1.2 Emulsions: The camera will be capable of handling and exposing Eastman Kodak films Special Order 132/130 or other films having equivalent or better photographic emulsions and physical properties.

3.9.1.3 Width: The system will use 5-inch wide film.

3.9.1.4 Spooled Film: The spooled film shall be in accordance with Itek Specification 49346.

3.9.1.5 Format: The format will be in accordance with Itek Drawing Number 43704.

3.9.2 Film Transport System: Film will be stored on supply and take-up spools. During camera operation, these spools will be driven at essentially constant speed which will be determined by the required cycling rate. (Proportional to V/h.) An intermittent transport system will meter unexposed film into the platen area between photographic scans. The film on the platen will be held stationary during the scanning portion of each cycle. Dancer loops will be utilized to store film supplied and taken up during scan. Supply and take-up spools will be controlled in a manner to maintain the proper amount of film in the dancer loops, thus

9040

TITLE

SPECIFICATION FOR 66" f/5
PANORAMIC CAMERA SUBSYSTEM

55155

SPECIAL HANDLING

SPECIAL HANDLING

preventing slack loops or excessive film tensions. The film path will be designed to ensure proper tracking of the film and to eliminate the possibility of film tear or damage to the emulsion. The film transport system will be designed to minimize static discharge in the active format area in aerial scenes.

3.9.2.1 Allowance for Film Splices: The film handling system and guides shall be designed to allow for smooth passage of the required number of proper film splices expected in each roll of operational film. The film transport shall be capable of passing film that has been properly butt-spliced with 1-inch wide polyester film tape (Minnesota Mining and Manufacturing Company, Type Number 850 or equivalent.)

3.9.2.2 Space Between Formats: The space between adjacent formats will be utilized for data recording. The maximum space permitted between picture formats shall be in accordance with format drawing 43704.

3.9.2.3 Rollers: All rollers in the film transport mechanism shall be consistent with good design practice determined by the type of film to be used. A minimum diameter of one inch shall be used.

3.9.2.4 Film Loading: The camera shall be capable of being loaded in subdued light using live film protected by 30 feet of leader.

3.9.2.5 Loss of Overlap During Camera Start: The allowance for loss of overlap during any starting of the film transport mechanism shall be a maximum of two (2) frames. From the time the start sequence command is received, the camera system shall be up to speed in approximately five seconds.

3.9.3 Supply and Take-up Spools

3.9.3.1 Capacity: Approximately 7500 feet of thin-base Estar 5-inch film (3-1/2 mil) (weight 75 pounds). A constraint on film capacity is that the recovery capsule of the system can only accommodate a film spool approximately 20 inches in diameter.

3.9.3.2 Interchangeability: Spools will be removable and interchangeable between cameras.

9040

TITLE
SPECIFICATION FOR 66" f/5
PANORAMIC CAMERA SUBSYSTEM

55155

SPECIAL HANDLING

SPECIAL HANDLING

3.9.3.3 Flanges: The flanges will be removable from the hub.

3.9.4 Cassette

3.9.4.1 Basic Design: The cassette will consist of the take-up spool and film take-up drive systems for the panoramic camera mounted in a unit structure to allow installation in the recovery system. The panoramic take-up spool and drive shall be controlled by the panoramic camera film transport mechanism. Consideration will be given in the cassette design for spool removal in dark conditions. The total power consumption of the cassette shall be held to a minimum.

3.9.4.2 Configuration: The design of the cassette will conform to the basic configuration and space limitation as shown by Drawing Number T55-100. Provision will be made for mounting the cassette within the vehicle in accordance with the mounting provisions as shown in Drawing Number T55-100.

3.9.4.3 Instrumentation

3.9.4.3.1 Thermal Instrumentation: One Ruge BN 2400 resistance thermometer will be installed in the cassette.

3.9.4.3.2 Maximum Temperature Indicator: A passive method of indicating maximum temperature in excess of 200 degrees F experienced by the take-up spool will be provided.

3.9.4.3.3 Remote Film Footage Indication Requirement: The panoramic take-up spool shall be provided with a transducer and the necessary electrical connections to permit remote indication of the amount of 5-inch film that is on the 20-inch take-up spool at any time during the operation. This shall be accurate within 5 percent over the total spool radius.

3.9.4.4 Design Requirements:

3.9.4.4.1 Cassette Weight: The weight of the complete cassette with empty spools without film shall be held to a minimum and shall not exceed 20 pounds.

3.9.4.4.2 Film Loading: The cassette shall be assembled with polyester leader attached to the spool and threaded through the film handling system with six feet of

9040

TITLE
SPECIFICATION FOR 66" f/5
PANORAMIC CAMERA SUBSYSTEM

55155

SPECIAL HANDLING

leader external to the cassette film entrance slot. This leader shall be spliced to the camera film for final assembly and testing purposes.

3.9.4.4.3 Film Capacity: The cassette shall contain a film spool of special design with a minimum diameter core and a 20-inch diameter flange capable of handling a film capacity of 19-15/16 inch diameter. The spacing between flanges shall be 5.0 ± 0.005 inches at the hub. Total run-in shall not exceed 0.030 inches at any point.

3.9.4.4.4 Panoramic Anti-Backup Device: The cassette shall be designed to incorporate a brake in the spool drive system to prevent the take-up spool from unwinding. This brake shall be capable of being released for test and checkout purposes by applying 28 volts DC on an appropriate pin connection. The brake shall be mechanically engaged when the voltage is removed.

3.9.4.4.5 Cassette Heaters: Heaters and associated thermostats required to maintain $70^{\circ} \pm 10^{\circ}$ F cassette temperature will be an SE responsibility. Itek will provide wiring within the cassette for the heaters.

3.9.4.5 Panoramic Take-up Performance: The take-up shall be capable of taking up the required amount of film as specified and shall be able to be started and stopped at least three hundred times during the taking up of a complete four-day roll of film under simulated duty cycle. The acceleration time shall be such that no slack loop will be formed during camera system operation. Film tension shall at all times be maintained between 1/4 to 2 pounds.

3.9.5 Optical System: Specification MIL-STD-150 shall be used as a guide in the design, manufacturing, and testing of the 66-inch lens.

3.9.5.1 Optical Characteristics: The optical characteristics of the lens, mirror, and filter shall meet the photo quality requirements of paragraph 3.4.1 when using the photographic film supplied per paragraph 3.9.1.

3.9.5.2 Lens: The panoramic camera lens is a 66-inch f/5 modified Tessar (Hyac type). The resolution shall approach diffraction limited performance at high contrast. Each lens will have focal length of 66 ± 0.25 inch. Custom lens/film plane assemblies may be required and hence need not be interchangeable. The lenses shall be

9040

TITLE

SPECIFICATION FOR 66" f/5
PANORAMIC CAMERA SUBSYSTEM

55155

SPECIAL HANDLING

SPECIAL HANDLING

calibrated so that nodal points will be nearly coincident with the axis of rotation and the focal length will be maintained at operational altitude and temperature of 70 ± 10 degrees F (see paragraph 3.5.3.2).

3.9.5.3 Cell: A beryllium or other suitable material cell will house the optical elements.

3.9.5.4 Stereo Mirror: The mirror shall not contribute a significant loss to the optical system. Every effort shall be made to minimize temperature gradients through thermal design, specifying shielding, etc.

3.9.6 Photographic Filter: A photographic filter shall be mounted in the optical path. This filter shall not degrade the photographic image when the camera is used for its intended purpose. The filter shall be of the proper value for the selected film emulsion to be used as a haze filter (similar to Wratten 12).

3.9.7 Scanning Drive and Shutter Mechanism: A scan drive and shutter mechanism will be provided to drive the lens and exposure slit in synchronism. Scanning speed and scan cycling rate will be proportional to V/h and will be designed to provide approximately 10 percent overlap, at the nadir, between successive frames. Scanning speed during exposure will be held constant to meet the requirements of paragraph 3.8.3 and 3.8.4 to provide good positional determination and to minimize IMC error. The lens will be in a latched position during launch.

3.9.8 Stereo Mirror Drive: The mirror and drive will be capable of providing for vertical photography and a fore and aft stereo convergence angle of up to 30 degrees (i.e., ± 15 degrees of vertical). The drive will tilt the mirror either fore or aft (in the stereo mode) and maintain its position fixed during scan. In the vertical mode, the drive will simply tilt the mirror to center position and hold it there. The mirror will be in stow position during launch.

3.9.9 Image Motion Compensation System: The cameras will be designed for a median $V/h = 0.03442$ radian/second. Upon receipt of proper IMC function selection, the system will compensate for ground motion and change cycling rate in such a manner as to maintain design overlap within the operating range. Frame to frame cycling times range from approximately 1.27 to 2.97 seconds over the design V/h range.

3.9.10 Exposure: Exposure shall be accomplished by utilizing a focal plane shutter. Exposure time may be varied by installing a fixed slit of appropriate width prior to flight. Four (4) slits

9040

TITLE

SPECIFICATION FOR 66" f/5
PANORAMIC CAMERA SUBSYSTEM

55155

Approved For Release 2002/10/21 : CIA-RDP66B00728R000300080009-0

SPECIAL HANDLING

Sheet 16 of 22 Sheets

SPECIAL HANDLING

will be provided in the exposure range of 1/100 to 1/800 in increments of approximately 1 f-stop.

3.9.11 Fiducial and Shrinkage Markers: Fiducial and shrinkage marks will be per Drawing 43704.

3.9.12 Telemetry Data Transducers: In accordance with SP2-156, Electrical Interface.

4.0 TEST REQUIREMENTS

4.1 General: The tests listed are to be performed in accordance with the requirements stated within this specification.

4.1.1 Test Location: Itek Laboratories, Lexington, Massachusetts.

4.1.2 Witnessing of Tests: Tests may be witnessed by the following:

System Engineering (SE)

Itek-authorized representatives

Other personnel designated by customer.

4.1.3 Records of Tests and Reports: Test data shall be recorded. The contractor shall prepare test reports covering the results of tests required in this specification referencing the results of each test to the applicable test specified herein. The acceptance test shall be reported to SE.

4.2 Acceptance Tests: Acceptance tests shall be run on production units to verify workmanship and operability. The individual tests shall be run with no adjustments or repairs during the course of the test. If any modifications or repairs are made following the completion of any acceptance test, all tests previously run on the unit must be repeated, unless an explicit waiver is granted by SE, based on the demonstration that the modification or repair will not affect the response to the particular test or tests.

4.3 Acceptance Test Minimum Requirements: The Pan cameras will be tested for acceptance in accordance with acceptance test specification 49976.

9040

Approved For Release 2002/10/21 : CIA-RDP66B00728R000300080009-0

TITLE
SPECIFICATION FOR 66" f/5
PANORAMIC CAMERA SUBSYSTEM

SPECIAL HANDLING

55155

Sheet 17 of 22 Sheets

SPECIAL HANDLING

4.3.1 Mating Test: The camera will be placed on a test fixture simulating the mechanical interfaces. This test fixture will be a precision instrument and the camera must fit the interface without alteration of the fixture. The camera system must align on all axes and must operate in accordance with this specification.

4.3.2 Functional Operation Test: With the simulated electrical interface of the checkout console, the camera will operate satisfactorily and respond to simulated commands. The camera shall be loaded with film and operated in both vertical and stereo modes in the horizontal attitude. The total film load shall be the maximum amount. At least 25 percent of the total film capacity should be operated through the camera during acceptance tests. This amount of film shall operate satisfactorily during the test without an assist of any manner whatsoever. The camera shall be started and stopped at least twenty-five times without any erratic operation or mishandling of film. Any malfunctions of loops, tracking or dancer rollers may be corrected, but the complete test shall be re-run.

4.3.3 Vibration Test: The camera mounted on the test fixture shall be placed on a vibration table and tests shall be run at prevailing room conditions. Test levels shall be selected such that levels attained will simulate those experienced during launch. After test, the camera shall be inspected for any visual defects. The equipment shall operate after being subjected to vibration in each of three mutually perpendicular axes, at a level of 1/2 to 1 g peak-to-peak using a frequency sweep program from 20 to 2000 cps at constant octave rate for a sweep time of 15 minutes, followed by a sweep from 2000 cps to 20 cps. The camera shall be operated for at least 100 cycles at maximum cycling rate following vibration. The optical resolution shall be measured in vacuum conditions following the vibration testing.

4.3.4 Electrical Insulation Tests: All electrical circuits shall be checked to the frame of the camera with a single application of 100 volts DC on 28-volt circuits and 300 volts DC on 115-volt circuits, and shall show a resistance of 1 megohm or greater. The wire harness shall be tested to the limits of 1072045 prior to the connection of subassemblies and components using 1000 volts DC megger limits.

4.3.5 Resolution Test: The camera shall be mounted in a fixture in the dynamic resolution tester using moving resolution targets described in paragraph 3.8.1. The camera shall be loaded with a test spool of unexposed film. The camera shall be operated and photograph the test patterns under dynamic conditions, to demonstrate satisfactory operation of the IMC control system and perform resolution tests in

9040

TITLE

SPECIFICATION FOR 66" F/5
PANORAMIC CAMERA SUBSYSTEM

55155

SPECIAL HANDLING

accordance with paragraph 3.8.1.

4.3.6 Fogging and Format Test: During operation of the camera, simulated auxiliary photo recording data shall be fed to the camera auxiliary data recording system. This data shall be examined upon developing of the film, to ascertain satisfactory operation.

4.3.6.1 Format Inspection: The length, width, and spacing of the format shall be measured to ascertain that these dimensions are within the design accuracy. The film shall be examined to ascertain that the fiducial and shrinkage marks are clear and readily discernible.

4.3.6.2 Light Tightness: A fogging test of live film will be administered to demonstrate the light tightness of the Panoramic Camera Subsystem per paragraph 3.5.3.3.

5.0 PREPARATION FOR DELIVERY

5.1 Packing and Packaging: Packing and packaging shall be adequate to protect all equipment when shipped or stored.

5.2 Handling, Mating, and Checkout: Adequate protective devices will be supplied.

9040

TITLE

SPECIFICATION FOR 66" f/5
PANORAMIC CAMERA SUBSYSTEM

55155

Approved For Release 2002/10/21 : CIA-RDP66B00728R000300080009-0

SPECIAL HANDLING

Sheet 19 : 22 Sheets

SPECIAL HANDLINGAPPENDIX AExceptions to 2.0 APPLICABLE DOCUMENTS1.0 EXCEPTIONS TO 6117B

- a. Change paragraph 1.1.5 to read "AET Engineering Department of Contractor."
- b. Delete paragraph 1.2.2.1 and substitute "Equipment shall be transported by military transport aircraft and motor vans. The equipment shall be protected and packaged to withstand such conditions as well as shock and vibration prevalent during shipping."
- c. Delete paragraph 1.2.3 and substitute "Contractor storage facilities will ordinarily be air-conditioned. However, heat and high humidity may occur, and equipment should be able to withstand such conditions."
- d. Delete paragraphs 1.2.4.1, 3.2.1.4, 3.2.1.5, 4.3.1, 4.4, 4.6, 4.7, and 4.8.
- e. Change paragraph 2.1 to read "MIL-E-5272C (ASG)-13 April 1959 and Amendment No. 1, 20 January 1960 - Environmental Testing, Aeronautical and Associated Equipment, General Specification for" - all other MIL standards not applicable.
- f. Delete paragraph 2.4.
- g. Delete paragraphs 3.2.1, 3.2.2.2, and 3.2.2.3.
- h. Change paragraph 4.1.1 to read "humidity of not more than 70 percent".
- i. Paragraphs 4.3 through 4.8.3 - not applicable.
- j. Delete paragraph 4.9.1 and 4.9.2.
- k. Delete paragraph 4.10.1.
- l. Table VI - not applicable.

9040

TITLE

SPECIFICATION FOR 66" f/5
PANORAMIC CAMERA SUBSYSTEM

55155

SPECIAL HANDLING

SPECIAL HANDLING

9040-63-702


Approved For Release 2002/10/21 : CIA-RDP66B00728R000300080009-0

C O N T E N T S

	<u>PAGE</u>
TOTAL COST SUMMARY.	1
BOSTON.	2
Manufacturing and Test	3
Cost Summary.	4
Materials	5
Special Installations	6
Engineering.	7
Cost Summary.	8
Optics	9
Cost Summary.	10
Materials	11
Program Management, Administration, and Support.	12
Cost Summary.	13
Materials	14
Communications.	14
Security.	14
Travel Schedule	15
PALO ALTO SUPPORT	16
Cost Summary.	17
Materials	18
Communications.	18
Travel Schedule	19
LABOR RATE SCHEDULE	20
FUNDING FORECAST SCHEDULE	21

25X1

25X1

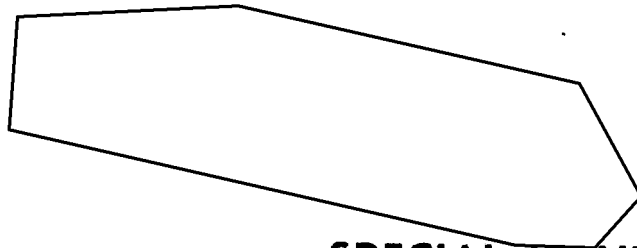

DOCUMENT NO. 16
NO CHANGE IN CLASS. ☐
☐ DECLASSIFIED
CLASS. CHANGED TO: TS 02011
NEXT REVIEW DATE: 17-7-81
REVIEWER:

SPECIAL HANDLING

25X1

Approved For Release 2002/10/21 : CIA-RDP66B00728R000300080009-0

Approved For Release 2002/10/21 : CIA-RDP66B00728R000300080009-0

BOSTON

SPECIAL HANDLING

MANUFACTURING AND TEST

SPECIAL HANDLING

25X1

Approved For Release 2002/10/21 : CIA-RDP66B00728R000300080009-0

Next 2 Page(s) In Document Exempt

Approved For Release 2002/10/21 : CIA-RDP66B00728R000300080009-0

SPECIAL HANDLING

ENGINEERING

SPECIAL HANDLING

25X1

Approved For Release 2002/10/21 : CIA-RDP66B00728R000300080009-0

Approved For Release 2002/10/21 : CIA-RDP66B00728R000300080009-0

SPECIAL HANDLING

Page 9 of 21 Pages

OPTICS

SPECIAL HANDLING

25X1

Approved For Release 2002/10/21 : CIA-RDP66B00728R000300080009-0

Next 1 Page(s) In Document Exempt

Approved For Release 2002/10/21 : CIA-RDP66B00728R000300080009-0

SPECIAL HANDLING

Page 12 of 21 Pages

Approved For Release 2002/10/21 : CIA-RDP66B00728R000300080009-0

PROGRAM MANAGEMENT, ADMINISTRATION AND SUPPORT

Approved For Release 2002/10/21 : CIA-RDP66B00728R000300080009-0

SPECIAL HANDLING

25X1

Approved For Release 2002/10/21 : CIA-RDP66B00728R000300080009-0

Next 2 Page(s) In Document Exempt

Approved For Release 2002/10/21 : CIA-RDP66B00728R000300080009-0

SPECIAL HANDLING

PALO ALTO SUPPORT

SPECIAL HANDLING

25X1

Approved For Release 2002/10/21 : CIA-RDP66B00728R000300080009-0

Next 4 Page(s) In Document Exempt

Approved For Release 2002/10/21 : CIA-RDP66B00728R000300080009-0